



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

AL200 Series LED

PROJECT INFORMATION

Project Name	Type
Catalog No	Date

DESCRIPTION

The AL200 Area Light Series is available in two wattages with a wide choice of mounting configurations and optical distributions designed to replace HID lighting systems from 70w to 175w MH or HPS.


Typical area lighting applications include building facades, general area and parking lighting, bridges, signage, accentuation of landscape and architectural details, flags, and general security lighting. Mounting heights from ground to 20 feet can be used based on light level and uniformity requirements.



FEATURES

- Tempered Clear Flat Glass Lens or Tempered Clear Flat Prismatic Glass Lens.
- Die Cast Aluminum Housing and Front Frame.
- Integral Heat Sinking and Driver Compartment.
- Photocell Adaptable.
- Nickel-Plated Stainless Steel Hardware.
- EasyLED, Aluminum Boards.
- CSA: Listed for Wet Locations.
- Operating Temperatures: -40°C to +50°C
- IP67 Sealed LED Compartment.

DIMENSIONS

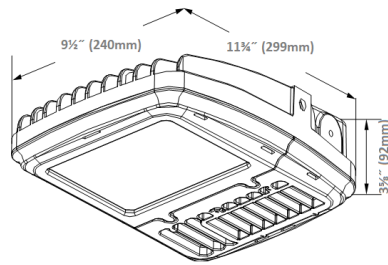

WARRANTY

5 years

Example

AL200 37w 4042 lm 11" 4000k MV SF PH DIM Bronze

ORDERING INFORMATION

AL200	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	22w 2390 lm 11" 37w 4042 lm 11"	4000K, 5000K	120-277V (MV)	Slipfitter (SF) Yoke (YK) Two-Piece Bracket (TPB)	Photocell (PC) Dimming (Dim) - "37w Only"	Bronze (BZ)