



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

GP580 Series LED

General Purpose



PROJECT INFORMATION

Project Name	Type
Catalog No	Date

DESCRIPTION

The GP-LED-580-13 Series Industrial LED fixture's versatile design makes it compatible for use as a Highbay, Flood Light, or a Canopy Light based on the mounting type used.


The GP-LED-580-13 Series fixture can be widely used indoor or outdoor lighting, like mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, stadiums and flower cultivating tents etc.



FEATURES

- Luminous Flux 100 lm/W.
- IP65.
- Rated Lifespan 50,000 burning hours.
- 100-277V AC.
- UL Listed.
- DLC Listed.

DIMENSIONS

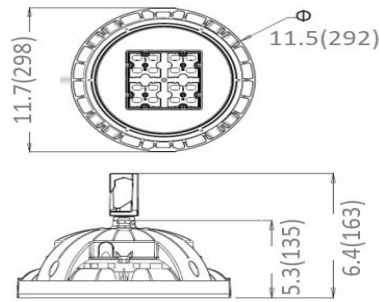

WARRANTY

5 years

Example

GP580 30w 3299 lm - 4000k MV UM PH Bronze

ORDERING INFORMATION

GP580	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	80w 9367 Lm -	4000K, 5000K	100-277V (MV)	U-Mount (UM) Slipfitter (SF) Yolk Mount (YM)	Photocell (PC)	Bronze
	40w 5200 Lm -	2700K, 3000K	100-277V (MV)	Hook (HK)	0-10V Dimming (10V)	Black
	60w 7800 Lm -	4000K, 5000K		U-Mount (UM)	Timing Dimming (TDim)	Green
	80w 10400 Lm -	5700K		Canopy (CM)	OCC Sensor (OCC)	Grey
	100w 13000 Lm -			Steel Cable (SC)	Anti-Glare Cover (AGC)	