



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

HZ120 Series LED

Hazardous Locations

PROJECT INFORMATION

| | |
|--------------|------|
| Project Name | Type |
| Catalog No | Date |

DESCRIPTION

This luminaire can be used as a replacement of traditional fluorescent lamps, which can provide general illumination in hazardous locations, such as Oil Refineries and Gas Stations, Oil and Gasoline Loading Docks, Distilleries, Paint Manufacturing Plants, Mines and Vessels.


Ratings and Certifications: NEMA 4X; IP66; UL 1598/UL1589A/UL844; CSA C22.2 No. 137/No. 250.0, Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III; Marine and Wet Locations; IECEX; ATEX.



FEATURES

- Surface Mount and Pendant Mount Options Available
- Wide and Narrow Optic Outputs for Uniform Illumination
- High Vibration Resistance
- Copper-free aluminum housing
- L70 Rated for 150,000 Burning Hours
- IP66

DIMENSIONS

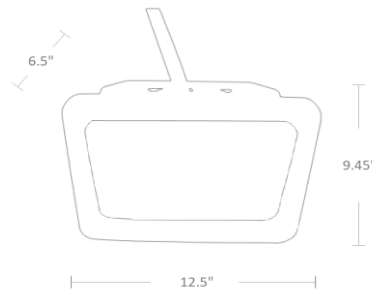

WARRANTY

10 Years

Example

| | | | | | | | | |
|--------------|------|-----------|-------|-------|----------|----|--------|---|
| HZ120 | 100W | 14,000 Lm | 12.5" | 4000K | 200-480V | SM | DIM GL | - |
|--------------|------|-----------|-------|-------|----------|----|--------|---|

ORDERING INFORMATION

| HZ120 | Watts / Lumens / Length | Color Temp | Voltage | Mounts | Options | Finish Options |
|-------|-------------------------|--------------|----------------------|------------------------------------|-----------------------------------|----------------|
| | 50W 7,000 Lm 12.5" | 4000K, 5000K | 100-277V or 200-480V | Surface Mount (SM) Pendant (PE) | Dimmable (DIM) Glass Lens (GL) | - |
| | 60W 8,400 Lm 12.5" | | | | | |
| | 80W 11,200 Lm 12.5" | | | | | |
| | 100W 14,000 Lm 12.5" | | | | | |
| | 120W 16,800 Lm 12.5" | | | | | |