



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

HZ121 Series LED

Hazardous Locations



PROJECT INFORMATION

Project Name	Type
Catalog No	Date

DESCRIPTION

This luminaire can be used as a replacement of traditional fluorescent lamps, which can provide general illumination in hazardous locations, such as Oil Refineries and Gas Stations, Oil and Gasoline Loading Docks, Distilleries, Paint Manufacturing Plants, Mines and Vessels.


Ratings and Certifications: NEMA 4X; IP66; UL 1598/UL1589A/UL844; CSA C22.2 No. 137/No. 250.0, Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III; Marine and Wet Locations; IECEX; ATEX.



FEATURES

- Surface Mount and Pendant Mount Options Available
- Wide and Narrow Optic Outputs for Uniform Illumination
- High Vibration Resistance
- Copper-free aluminum housing
- L70 Rated for 150,000 Burning Hours
- IP66

DIMENSIONS

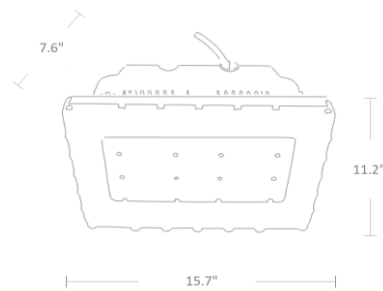

WARRANTY

10 Years

Example

HZ121 60W 8,400 Lm 15.7" 4000K 200-480V SM DIM GL -

ORDERING INFORMATION

HZ121	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	60W 8,400 Lm 15.7"	4000K, 5000K	100-277V or 200-480V	Surface Mount (SM) Pendant (PE)	Dimmable (DIM) Glass Lens (GL)	-
	80W 11,200 Lm 15.7"					
	100W 14,000 Lm 15.7"					
	120W 16,800 Lm 15.7"					
	150W 21,000 Lm 15.7"					
	190W 26,600 Lm 15.7"					
	220W 30,800 Lm 15.7"					