



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

HZ150 Series LED

Hazardous Locations



PROJECT INFORMATION

Project Name	Type
Catalog No	Date

DESCRIPTION


This luminaire can be used as a replacement of traditional fluorescent lamps, which can provide general illumination in hazardous locations, such as Oil Refineries and Gas Stations, Oil and Gasoline Loading Docks, Distilleries, Paint Manufacturing Plants, Mines and Vessels.

Ratings and Certifications: NEMA 4X; IP66; UL 1598/UL1589A/UL844; CSA C22.2 No. 137/No. 250.0, Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III; Marine and Wet Locations; IECEx; ATEX.

FEATURES

- Surface Mount and Pendant Mount Options Available
- Wide and Narrow Optic Outputs for Uniform Illumination
- High Vibration Resistance
- Copper-free aluminum housing
- L70 Rated for 150,000 Burning Hours
- IP66

DIMENSIONS

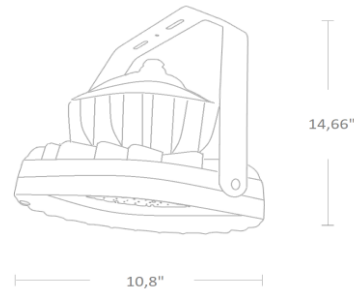

WARRANTY

10 Years

Example

HZ150	150W	21,000 Lm	14.66"	4000K	200-480V	SM	DIM WG	-
--------------	------	-----------	--------	-------	----------	----	-----------	---

ORDERING INFORMATION

HZ150	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	40W 5,600 Lm 14.66"	4000K, 5000K	100-277V or 200-480V	Surface Mount (SM) Pendant (PE)	Dimmable (DIM) Glass Lens (GL) Wire Guard (WG)	-
	50W 7,000 Lm 14.66"					
	60W 8,400 Lm 14.66"					
	80W 11,200 Lm 14.66"					
	100W 14,000 Lm 14.66"					
	120W 16,800 Lm 14.66"					
	150W 21,000 Lm 14.66"					