



420 Highland Ave. Ext, Middletown, N.Y. 10940  
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044  
 © RTG Lighting, Inc. | sales@rtglighting.com

# HZ156 Series LED

## Hazardous Locations



### PROJECT INFORMATION

Project Name	Type
Catalog No	Date

### DESCRIPTION


This luminaire can be used as a replacement of traditional fluorescent lamps, which can provide general illumination in hazardous locations, such as Oil Refineries and Gas Stations, Oil and Gasoline Loading Docks, Distilleries, Paint Manufacturing Plants, Mines and Vessels.

Ratings and Certifications: NEMA 4X; IP66; UL 1598/UL1589A/UL844; CSA C22.2 No. 137/No. 250.0, Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III; Marine and Wet Locations; IECEx; ATEX.

### FEATURES

- Surface Mount and Pendant Mount Options Available
- Wide and Narrow Optic Outputs for Uniform Illumination
- High Vibration Resistance
- Copper-free aluminum housing
- L70 Rated for 150,000 Burning Hours
- IP66

### DIMENSIONS

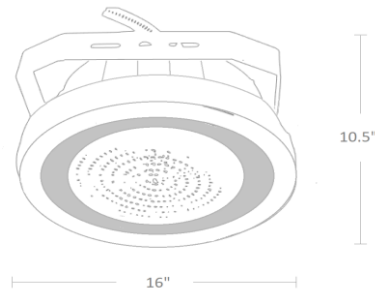

### WARRANTY

10 Years

Example

<b>HZ156</b>	180W	25,200 Lm	16"	4000K	200-480V	SM	DIM	-
--------------	------	-----------	-----	-------	----------	----	-----	---

### ORDERING INFORMATION

HZ156	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	60W 8,400 Lm 16"	4000K, 5000K	100-277V or 200-480V	Surface Mount (SM) Pendant (PE)	Dimmable (DIM) Glass Lens (GL)	-
	80W 11,200 Lm 16"					
	100W 14,000 Lm 16"					
	120W 16,800 Lm 16"					
	150W 21,000 Lm 16"					
	180W 25,200 Lm 16"					
	200W 28,000 Lm 16"					
	240W 33,600 Lm 16"					