



420 Highland Ave. Ext, Middletown, N.Y. 10940
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044
 © RTG Lighting, Inc. | sales@rtglighting.com

RW910 Series LED

Roadways



PROJECT INFORMATION

Project Name	Type
Catalog No	Date

DESCRIPTION

The RW-LED-910 is truly an energy efficient roadway fixture. The RW-LED-910 provides uniform light distribution in any given environment while using minimum power consumption. The slim design provides low wind resistance thus minimizing wind load requirements.


Its sides are constructed with die-cast aluminum and is designed to maximize heat dissipation. This technology allows the fixture to run cooler, maximizing the operating life.



FEATURES

- Roadways, Freeways, Highways, Parking Lots, Off-streets Areas, etc.
- Efficiency of chips: 150-165 lm/w, 180-195 lm/w
- LENS: Optical grade PC, anti-UV oxidation.
- Beam Angle: Type II, Type III
- Housing: die casting aluminum housing with excellent heat dissipation, surface treated
- with powder coated finish for corrosion and static resistance.
- Input voltage: 120-277 VAC, 50/60 HZ
- LED module can be dismantled separately for maintenance.
- LED driver: constant current, efficiency is up to 92%.
- IP65
- UL and DLC Listed

DIMENSIONS

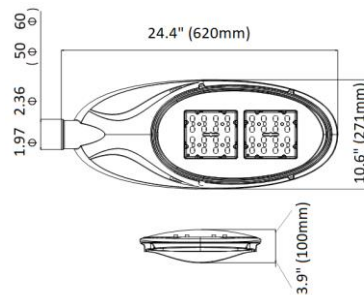

WARRANTY

5 years

ORDERING INFORMATION

Example

RW910 90w 13800 lm 24" 5000K MV 10V Coffee

RW910	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	40w 6,200 lm 24"	2700K, 3000K	120-277 (MV)		0-10V Dimming (10V)	Silver (Standard)
	60w 9,500 lm 24"	4000K, 5000K				
	90w 13,800 lm 24"	5700K, 6500K				
	120w 18,399 lm 24"					