



420 Highland Ave. Ext, Middletown, N.Y. 10940  
 Office: 845-360-5363 | Toll Free: 800-781-8027 | Fax: 775-255-3044  
 © RTG Lighting, Inc. | sales@rtglighting.com

# LPT8-EM Series LED

## Emergency Battery Backup



### PROJECT INFORMATION

Project Name	Type
Catalog No	Date

### DESCRIPTION


The LPT8-EM LED Series Retrofit is the quickest and easiest way to convert from T8 Fluorescent to more efficient LED technology. Emergency Battery Backup included.

With simple installation, these tubes will have you saving energy immediately.

### FEATURES

- Smooth and pleasant appearance.
- Instant on, no flicker.
- EM 90mins, emergency power: 3W single end power input
- No harmful mercury.
- Over 40% energy savings when compared to fluorescent.
- DLC Listed
- CRI >80
- RoHs Compliant
- Rated LifeSpan: 50,000 Burning Hours.
- Beam Angle 140°
- Internal isolated driver

### DIMENSIONS

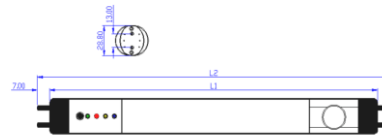

Item	0.9m 3ft	1.2m 4ft	1.5m 5ft
L1	884mm	1198mm	1498mm
L2	908mm	1212mm	1512mm

### WARRANTY

5 years

Example

**LPT8-EM** 18W 1890 LM 4' 3500k MV - EM -

### ORDERING INFORMATION

LPT8-EM	Watts / Lumens / Length	Color Temp	Voltage	Mounts	Options	Finish Options
	13W 1,365 lm 3'	3500K	100-277V (MV)	-	Emergency Battery Backup (EM)	-
	18W 1,890 lm 4'	4000K or 5000K				